

On the preconditioned conjugate gradient solution of a Stokes problem with Robin-type boundary conditions

Sur la résolution d'un problème de Stokes avec conditions aux limites du type Robin par un algorithme de gradient conjugué préconditionné

Roland Glowinski^{a,b} Giovanna Guidoboni^b

^aLaboratoire Jacques-Louis Lions, Université P. et M. Curie, 4 Place Jussieu, 75005, Paris, France

^bDepartment of Mathematics, University of Houston, PGH 651, Houston, Texas 77204-3476, USA

Abstract

We discuss the solution by a preconditioned conjugate gradient algorithm of a Stokes problem with Robin-type boundary conditions. This Stokes problem is encountered when applying an appropriate operator-splitting scheme to the time-discretization of a system modeling the interaction of an incompressible viscous fluid with a deformable thin elastic structure. The main contribution of this note is the identification of a preconditioner operating in the pressure space that reduces substantially the number of iterations when compared to a conjugate gradient algorithm equipped with the canonical scalar product of L^2 . The results of numerical experiments show the validity of our approach. *To cite this article: R. Glowinski, G. Guidoboni, C. R. Acad. Sci. Paris, Ser. I xxx (xxx).*

Résumé

Dans cette note on étudie la résolution d'un problème de Stokes avec conditions aux limites du type Robin par un algorithme de gradient conjugué préconditionné. On rencontre ce type de problèmes lorsque l'on applique certains schémas de discrétisation en temps par décomposition d'opérateurs à la résolution numérique du système d'équations aux dérivées partielles modélisant l'interaction d'un fluide visqueux incompressible avec une structure élastique mince. La contribution principale de cette note est l'identification d'un opérateur de préconditionnement agissant dans l'espace des pressions (en l'occurrence $L^2(\Omega)$); cet opérateur réduit considérablement le nombre d'itérations nécessaires à la convergence, lorsque l'on compare à l'algorithme de gradient conjugué opérant dans $L^2(\Omega)$ muni de son produit scalaire canonique. Les résultats d'essais numériques confirment la validité de notre approche. *Pour citer cet article : R. Glowinski, G. Guidoboni, C. R. Acad. Sci. Paris, Ser. I xxx (xxx).*

Email addresses: roland@math.uh.edu (Roland Glowinski), gio@math.uh.edu (Giovanna Guidoboni).

2. An equivalent pressure formulation of problem (7)

Let us define the following linear operator from $L^2(\Omega)$ into $L^2(\Omega)$

$$Aq = \nabla \cdot \mathbf{u}_q \quad \forall q \in L^2(\Omega), \quad (8)$$

where \mathbf{u}_q is the unique solution of the following linear variational problem:

$$\mathbf{u}_q \in V; \quad \alpha \int_{\Omega} \mathbf{u}_q \cdot \mathbf{v} \, d\mathbf{x} + \beta \int_0^L u_{q2}|_{\Gamma} v_2|_{\Gamma} \, dx_1 + 2\mu \int_{\Omega} \mathbf{D}(\mathbf{u}_q) : \mathbf{D}(\mathbf{v}) \, d\mathbf{x} = \int_{\Omega} q \nabla \cdot \mathbf{v} \, d\mathbf{x}, \quad \forall \mathbf{v} \in V.$$

Following [6] Section 19.3, it can be shown that A is a strongly elliptic, symmetric automorphism of $L^2(\Omega)$. Thanks to these properties of operator A , problem (7) can be solved using a conjugate gradient method operating in $L^2(\Omega)$. Numerical experiments show that if the conjugate gradient method uses the classical scalar product in $L^2(\Omega)$, then the rate of convergence is pretty slow if $\alpha \gg \mu$. Unfortunately, this is the case for the application that motivates the present analysis, namely the modeling of blood flow in large arteries (see e.g. [2,3]). In order to improve the speed of convergence of the conjugate gradient algorithm, there is need for preconditioning (see [6] Chapter IV, Section 21.3). Preconditioning operators are available for the case of Dirichlet and/or stress related boundary conditions, but not for the boundary conditions in (5). This is the novelty introduced by the elasticity of Γ .

In order to avoid the deterioration of the convergence properties, associated with large values of the ratio α/μ , we will employ as scalar product on $L^2(\Omega)$ the one advocated in [5], namely

$$\{q, q'\} \rightarrow \int_{\Omega} (B^{-1}q)q' \, d\mathbf{x} \quad \forall q, q' \in L^2(\Omega), \quad (9)$$

where the operator B^{-1} is defined via its inverse $B = \alpha(-\Delta)^{-1} + \mu I$; here I is the identity operator, and the Green operator $(-\Delta)^{-1}$ is associated with the boundary conditions (3)-(5) and it will be defined in the next section (see equation (17)). We remark that it is not necessary to know the operator B^{-1} explicitly, but it is sufficient to know its inverse B , see [6].

In order to identify the optimal preconditioning operator for the case at hand, we are going to consider a one dimensional situation where B can be computed explicitly.

3. A one dimensional case

Let us consider the bounded and open interval $(0, l)$. By analogy with the multi-dimensional case presented in Section 2, we define the operator A from $L^2(0, l)$ into $L^2(0, l)$ as $Aq = u'_q$, where u_q is the solution of the following problem

$$\alpha u_q - \mu u''_q = -q' \quad \text{in } (0, l), \quad u_q(0) = 0, \quad \beta u_q(l) + \mu u'_q(l) = q(l). \quad (10)$$

Consider now the operator B defined by $Bq = \alpha \varphi_q + \mu q$ where φ_q is the solution of:

$$-\varphi''_q = q \quad \text{in } (0, l), \quad \varphi'_q(0) = 0, \quad \varphi_q(l) + \alpha \varphi'_q(l) = 0. \quad (11)$$

Theorem 3.1 *If $a = \beta/\alpha$, then $B^{-1} = A$.*

Proof: We need to show that $B(Aq) = Bu'_q = q$. By definition, $Bu'_q = \alpha \varphi_q + \mu u'_q$ where φ_q solves

$$-\varphi''_q = u'_q \quad \text{in } (0, l), \quad \varphi'_q(0) = 0, \quad \varphi_q(l) + \alpha \varphi'_q(l) = 0. \quad (12)$$

Therefore we have to show that $\alpha \varphi_q + \mu u'_q = q$. Integrating (12) from 0 to x and using the boundary conditions at $x = 0$ we obtain that

$$-\varphi'_q(x) = u_q(x), \quad (13)$$

which also holds at $x = l$. Now, combining (10) and (13) we get

$$-\alpha\varphi'_q - \mu u''_q = -q' . \quad (14)$$

Integrating (14) from x to l , using (10), (11), and the fact that $-\varphi'_q(l) = u_q(l)$ we get:

$$a\alpha\varphi'_q(l) - \beta\varphi'_q(l) + \alpha\varphi_q(x) + \mu u'_q(x) = q(x) . \quad (15)$$

This implies that if $a = \beta/\alpha$ then $\alpha\varphi_q + \mu u'_q = q$, and this completes the proof. \square

4. A preconditioned conjugate gradient algorithm

Motivated by Theorem 3.1, we advocate the use of the following scalar product in $L^2(\Omega)$:

$$\{q, q'\} \rightarrow \int_{\Omega} (B^{-1}q)q' \, d\mathbf{x} \quad (16)$$

with B defined as $Bq = \alpha\varphi_q + \mu q$, where φ_q solves the following problem:

$$-\nabla^2\varphi_q = q \quad \text{in } \Omega, \quad \varphi_q = 0 \quad \text{on } \Sigma_0 \cup \Sigma_L, \quad \partial\varphi_q/\partial n = 0 \quad \text{on } \Sigma_b, \quad \varphi_q + a\partial\varphi_q/\partial n = 0 \quad \text{on } \Gamma. \quad (17)$$

Finally, the preconditioned conjugate gradient algorithm to solve problem (7) reads as follows:

Take an initial guess $p^0 \in L^2(\Omega)$ and then find $\mathbf{u}^0 \in V$ such that

$$\alpha \int_{\Omega} \mathbf{u}^0 \cdot \mathbf{v} \, d\mathbf{x} + \beta \int_0^L u_2^0|_{\Gamma} v_2|_{\Gamma} \, dx_1 + 2\mu \int_{\Omega} \mathbf{D}(\mathbf{u}^0) : \mathbf{D}(\mathbf{v}) \, d\mathbf{x} = \int_{\Omega} p^0 \nabla \cdot \mathbf{v} \, d\mathbf{x} + L(\mathbf{v}) \quad \forall \mathbf{v} \in V, \quad (18)$$

and set $r^0 = \nabla \cdot \mathbf{u}^0$. Solve now

$$-\nabla^2\varphi^0 = r^0 \quad \text{in } \Omega, \quad \varphi^0 = 0 \quad \text{on } \Sigma_0 \cup \Sigma_L, \quad \partial\varphi^0/\partial n = 0 \quad \text{on } \Sigma_b, \quad \varphi^0 + a\partial\varphi^0/\partial n = 0 \quad \text{on } \Gamma. \quad (19)$$

Then set $g^0 = \mu r^0 + \alpha\varphi^0$ and $w^0 = g^0$.

For $k \geq 0$, assuming that p^k, r^k, g^k, w^k are known, compute $p^{k+1}, r^{k+1}, g^{k+1}, w^{k+1}$ as follows.

Find $\bar{\mathbf{u}}^k \in V$ such that

$$\alpha \int_{\Omega} \bar{\mathbf{u}}^k \cdot \mathbf{v} \, d\mathbf{x} + \beta \int_0^L \bar{u}_2^k|_{\Gamma} v_2|_{\Gamma} \, dx_1 + 2\mu \int_{\Omega} \mathbf{D}(\bar{\mathbf{u}}^k) : \mathbf{D}(\mathbf{v}) \, d\mathbf{x} = \int_{\Omega} w^k \nabla \cdot \mathbf{v} \, d\mathbf{x} \quad \forall \mathbf{v} \in V, \quad (20)$$

and set $\bar{r}^k = \nabla \cdot \bar{\mathbf{u}}^k$. Compute

$$\varrho_k = \int_{\Omega} r^k g^k \, d\mathbf{x} / \int_{\Omega} \bar{r}^k w^k \, d\mathbf{x}, \quad (21)$$

and then $p^{k+1} = p^k - \varrho_k w^k$ and $r^{k+1} = r^k - \varrho_k \bar{r}^k$. Solve, next,

$$-\nabla^2\bar{\varphi}^k = \bar{r}^k \quad \text{in } \Omega, \quad \bar{\varphi}^k = 0 \quad \text{on } \Sigma_0 \cup \Sigma_L, \quad \partial\bar{\varphi}^k/\partial n = 0 \quad \text{on } \Sigma_b, \quad \bar{\varphi}^k + a\partial\bar{\varphi}^k/\partial n = 0 \quad \text{on } \Gamma. \quad (22)$$

Then compute $g^{k+1} = g^k - \varrho_k(\mu\bar{r}^k + \alpha\bar{\varphi}^k)$. If

$$\int_{\Omega} r^{k+1} g^{k+1} \, d\mathbf{x} / \int_{\Omega} r^0 g^0 \, d\mathbf{x} \leq \epsilon, \quad (23)$$

take $p = p^{k+1}$; else, compute $\gamma_k = \int_{\Omega} r^{k+1} g^{k+1} \, d\mathbf{x} / \int_{\Omega} r^k g^k \, d\mathbf{x}$, and update w^k by $w^{k+1} = g^{k+1} + \gamma_k w^k$. Do $k = k + 1$ and return to (20).

The main novelty of the scheme (18)-(23) consists in the new type of boundary conditions for the auxiliary function φ on the elastic portion of the boundary. From the classical theory of preconditioned conjugate gradient methods for incompressible viscous fluids (see [6] and the references therein), it is well

known that where Dirichlet conditions for the normal component of the velocity are imposed, then one imposes $\partial\varphi/\partial n = 0$ for the auxiliary elliptic problem for the function φ . On the other hand, where a condition on the fluid stress is imposed, then one imposes $\varphi = 0$. For the boundary conditions of the problem at hand, we need to impose a Robin boundary condition on φ , see (19) and (22). The optimal value of the constant a in the Robin condition for φ is tightly related to the parameters α and β of problem (7). The optimality of this constant has been proved in Theorem 3.1 only for a simple one-dimensional problem, but our numerical experiments show the same trend in the multi-dimensional case.

5. Numerical results

To solve problem (18)-(23), we use an isoparametric version [6] of the Bercovier-Pironneau finite elements spaces [1]. This approximation, known as the $P1$ -iso- $P2$ and $P1$ approximation, requires the use of two different meshes: a coarse mesh for the pressure (mesh size h_p) and a finer mesh for the velocity (mesh size $h_v = h_p/2$). Problems (18) and (20) are solved on the fine mesh, while problems (19) and (22) are solve on the coarse mesh. This significantly reduces the computational costs of the algorithm.

The numerical results presented in this Section have been obtained for $H = 0.5$, $L = 6$, $\eta = 0$, $\mathbf{u}_0 = \mathbf{0}$, $p^0 = 0$, $h_p = H/8$, and $\epsilon = 10^{-13}$. We have considered three different cases. *Case 1*: $\alpha = 1 \times 10^3$, $\mu = 1.0$, $\beta = 1 \times 10^2$; *Case 2*: $\alpha = 1 \times 10^3$, $\mu = 1.0$, $\beta = 1 \times 10^4$; *Case 3*: $\alpha = 1 \times 10^3$, $\mu = 0.035$, $\beta = 1.1 \times 10^2$. We remark that the parameter values encountered in blood flow modeling correspond to *Case 3*. In Figure 2 we compare the performance of the preconditioned conjugate gradient algorithm with respect to its classical version (with the scalar product in L^2). In all the three cases presented here, the preconditioning significantly reduces the number of iterations needed for convergence. In Figure 3 we show how the value of constant a in the Robin condition for φ (see (12), (19) and (22)) affects the speed of convergence of the preconditioned conjugate gradient scheme. The results in Figure 3 correspond to *Case 1*, and they show that the optimal value for the constant a is around 0.1. This is in very satisfactory agreement with the optimal value predicted by Theorem 3.1, namely $a = \beta/\alpha = 0.1$. The results shown in this note are obtained for $\eta = 0$, but the case of $\eta = \eta(x_1)$ does not present any additional difficulty. Our approach can easily handle flows in domains with curved boundaries [8], even at high Reynolds numbers, see [7].

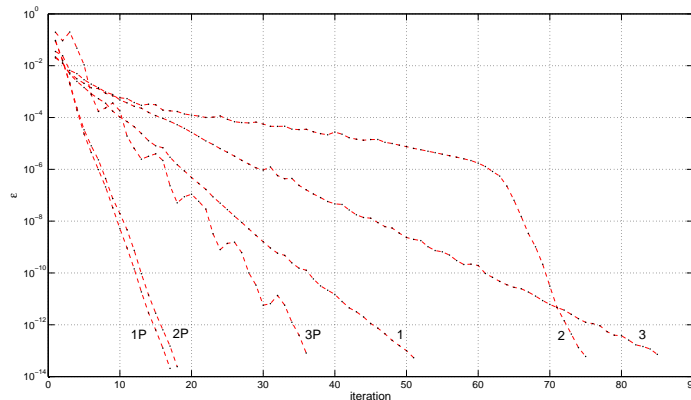


Figure 2. Convergence of the conjugate gradient algorithm for *Case 1*, *Case 2* and *Case 3* with preconditioning (curves 1P, 2P and 3P) and without preconditioning (curves 1, 2, 3). *Convergence de l'algorithme de gradient conjugué dans les Cas 1, 2 et 3 avec préconditionnement (courbes 1P, 2P et 3P) et sans préconditionnement (courbes 1, 2 et 3).*

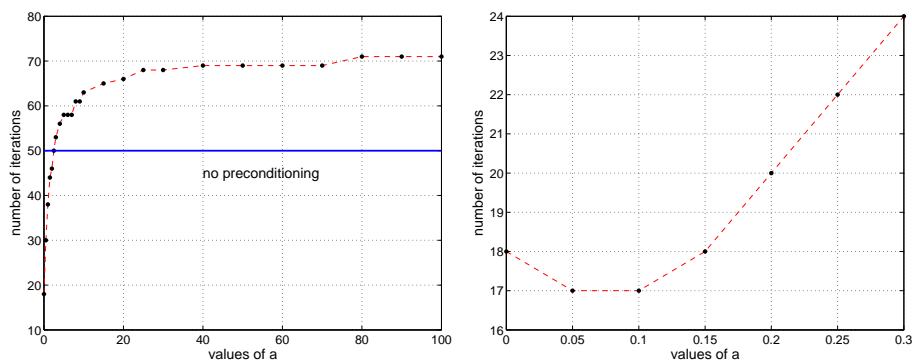


Figure 3. Influence on the number of iterations of the constant a in the Robin condition verified by φ . *Influence sur le nombre d'itérations de la constante a dans la condition de Robin vérifiée par φ .*

Acknowledgements

The authors are very thankful to the reviewer for the helpful comments and suggestions. Guidoboni was supported in part by the NSF grant DMS 0811138, the ARP Program 003652-0051-2006, and by UH Summer Research Grant 2006. Glowinski was supported in part by NSF grant DMS 0811138, the NSF/NIH grant NIGMS/DMS 0443826 and by the NSF grant ATM 0417867.

References

- [1] M. Bercovier, O. Pironneau, Error estimates for finite element method solution of the Stokes problem in primitive variables, *Numer. Math.* **33** (1979) 211-224
- [2] S. Canic, C.J. Hartley, D. Rosenstrauch, J. Tambaca, G. Guidoboni and A. Mikelic, Blood Flow in Compliant Arteries: An Effective Viscoelastic Reduced Model, *Numerics and Experimental Validation. Ann. Biomed. Eng.*, Vol. 34, No. 9 (2006) 575 - 592
- [3] S. Canic, J. Tambaca, G. Guidoboni, A. Mikelic, C.J. Hartley and D. Rosenstrauch, Blood Flow in Compliant Arteries: An Effective Viscoelastic Reduced Model, *Numerics and Experimental Validation. SIAM J. Appl. Math.*, Vol. 67 (2006) 164-193
- [4] P. Causin, J.F. Gerbeau and F. Nobile, Added-mass effect in the design of partitioned algorithms for fluid-structure problems. *Comput. Methods Appl. Mech. Engrg.*, Vol. 194 (2005) 4506-4527
- [5] J. Cahouet, J.P. Chabard, Some fast 3 D finite element solvers for the generalized Stokes problem. *Internat. J. Numer. Methods Fluids*, Vol. 8 (1988) 269-295
- [6] R. Glowinski, Finite element methods for incompressible viscous flow. *Handbook of Numerical Analysis, Volume IX*, P.G. Ciarlet and J.-L. Lions eds., North-Holland, Amsterdam (2003), 3-1176
- [7] R. Glowinski, G. Guidoboni, T.-W. Pan Wall-driven incompressible viscous flow in a two-dimensional semi-circular cavity. *J. Comput. Phys.*, Vol. 216, no. 1 (2006), 76-91
- [8] G. Guidoboni, R. Glowinski, N. Cavallini, S. Canic, Stable loosely-coupled-type algorithms for fluid-structure interaction in blood flow. Accepted for publication in *J. Comput. Phys.*
- [9] G. Guidoboni, R. Glowinski, N. Cavallini, S. Canic, S. Lapin, A kinematically coupled time-splitting scheme for the fluid-structure interaction in blood flow. *Applied Math. Letters.*, Vol. 22 (2009), pp. 684-688
- [10] A. Quarteroni, M. Tuveri and A. Veneziani, Computational vascular fluid dynamics: problems, models and methods. *Comput. Visual. Sci.*, Vol. 2 (2000) 163-197